

# AutoCool® + H Secure Refrigerated Storage Specification

AutoCool +H delivers access-controlled refrigerated storage and computer driven dispensing for your valuable refrigerated medications. It enables centralized control and reporting and is scalable to accommodate expanding needs and satellite locations. AutoCool +H is fully integrated with AutoPharm<sup>®</sup> Enterprise software to provide one inventory solution.



## AutoCool +H

## **Features**

- Digital temperature display
- Automatic temperature and humidity logging
- Locking heavy-duty casters
- Air cooled, forced air refrigeration system for uniform temperature and quick recovery
- Dual-temperature probes
- Lockable front door

## **Patient Safety**

AutoCool +H supports bar code confirmation of all dispensing and put-away activities for your refrigerated medications. It limits personnel actions through password secured doors.

## **Enhanced Efficiency**

AutoCool +H integrates with AutoPharm Enterprise, the powerful software platform that enables complete management of your medication inventory from arrival at the pharmacy to delivery to the patient care area.




## **Complete Inventory Control**

AutoCool +H can consolidate your refrigerated medications as a part of a comprehensive, integrated inventory system. It enables easy, centralized control and perpetual inventory management based on par-levels and supports integrated wholesale ordering.

8

## **AutoCool +H Specifications**

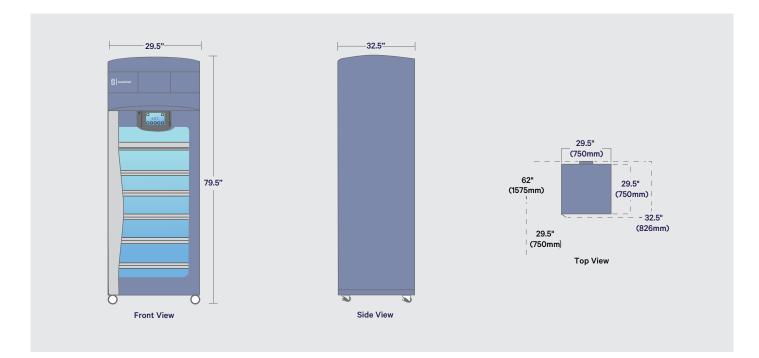

### Capacity

Number of Shelves: 7 Totes per Shelf: 3 to 20 pending configuration Total Number of Totes: 21 to 140 Volume per Tote: max 7.76 liters Total Capacity by Volume: max 96.7 L \*Bins and dividers sold separately

#### Operation

Uniform Internal Temperature: 2° - 10° Number of Thermistors: 2 Number of Compressors: 1 Refrigerant: R-134A Environment Temperature: 15° to 32° C Environment Humidity: max 80% Workstation Required: Yes Workstation Operating System: Windows 10

#### Power

Main Power: 115 VAC 7.5A 1-Phase Required: NEMA 5-15R Hospital Grade Duty Cycle: 100% Manual Operation, if Needed: Yes Note: The AutoCool +H is UL/CSA Compliant.

#### **Site Requirements**

Prior to installation, a site survey will be completed to ensure there are no physical obstructions that would affect installation.

#### **Clearance Required**

Right/Left Sides: 1.5" Back: 3.0" Top: 8.0"

Weight: 25 lbs/239 kg

## **Swisslog Healthcare**

At Swisslog Healthcare, we strive to lead change for better care. At the core of this vision is a focus on improving workflows and reducing the time clinicians spend doing repetitive tasks—enabling more time to care for patients and residents. Our solutions and services extend across the continuum of care, including transport, medication and supply chain management for long-term care facilities, consolidated service centers, hospitals and health systems.

#### CONTACT

Swisslog Healthcare healthcare.us@swisslog.com 800.764.0300 swisslog-healthcare.com/autocool AutoCool and AutoPharm are trademarks or registered trademarks registered in the US Patent and Trademark Office. Swisslog Healthcare systems may be covered by one or more patents. See swisslog-healthcare.com/patents for details. © 2020 Swisslog Healthcare EN NAM 112020 ACH-200